

## Specifications

### Environmental Performance

Operating Temperature	+ 15°C to + 45°C
Operating Humidity	10% to 90% non-condensing
Operating Atmospheric Pressure	400 mmHg to 850 mmHg

### Mechanical Specifications

Pressure Range	- 30 to 300 mmHg
Overpressure Withstand	- 400 mmHg to + 4000 mmHg
Mounting	Any axis

### Safety Features

Risk Current	Less than 5mA
Defibrillation Withstand	5 cycles in 5 minutes @ 360J

### Electrical Performance

Transducer Excitation Voltage	1 Vrms to 10 Vrms
Transducer Supply Frequency	DC to 5000 Hz
Phase Shift	< 5°
Transducer Excitation Impedance	1200 Ω to 2200 Ω
Transducer Signal Impedance	285 Ω to 375 Ω
Transducer Symmetry	- 5% to + 5%
Accuracy	Meets AAMI / ANSI BP22 (1994) Standard
Sensitivity	4.95 μ VV/mmHg to + 5.05 μ VV/mmHg
Zero Drift After 5 min Warm-up	< 1 mmHg in 4 hrs
Temperature Sensitivity Coefficient	< 0.1%/°C
Zero Offset	- 20 mmHg to + 20 mmHg
Light Sensitivity	< 1 mmHg
Mechanical Shock (2ms sine, 3 axis)	500g
Vibration (20Hz to 2kHz, 1 octave/min, 3 axis)	20g

## Contents

All kits include sterile ACCUTRANS disposable pressure transducer with integral 3- or 30cc/hr flush devices with pressure relief functions. The table below identifies additional components include in sterile, packaged single-use Pressure Monitoring Kits by catalog number. All Luers are supplied protected with vented caps. All required non-vented caps are supplied in a separate pouch within each kit package.

Product Code	Description	Integral Flush Device*	Extension Tubing	Stopcock	Distal Tubing	Qty Of Sterile Kits Per Box
AT	Standalone DPT Without Flush Device	None	None	None	None	25
AT-30**	Standalone DPT With Flush Device (Infant/Neonatal)	30 cc/hr	None	None	None	25
AT-24-30**	Single DPT System (Infant/Neonatal)	30 cc/hr	24" (61cm)	None	None	10
AT-3	Standalone DPT With Flush Device (Adult)	3 cc/hr	None	None	None	25
AMT 12-3	Single DPT System (Adult - with patient strap and sheath)	3 cc/hr	12" (30cm)	None	None	5
AMT 4812-3	Single DPT System (Adult - with patient strap and sheath)	3 cc/hr	48" (122cm)	3-way	12" (30cm)	5
AT 4812-3	Single DPT System (Adult)	3 cc/hr	48" (122cm)	3-way	12" (30cm)	5
AT2 4812-3	Bifurcated DPT System (Adult)	3 cc/hr	48" (122cm)	3-way	12" (30cm)	5
AT3 4812-3	Trifurcated DPT System (Adult)	3 cc/hr	48" (122cm)	3-way	12" (30cm)	5
AT 6012-3	Single DPT System with 60" extension tubing (Adult)	3 cc/hr	60" (152cm)	3-way	12" (30cm)	5

\* Flush rates indicated are nominal and were obtained with 300mmHg pressure. Fast Flush rates vary with the type of administration set and length and lumen diameter of the monitoring tubing catheter

\*\* Kits supplied with 30cc/hr (yellow banded) flush devices are intended for infant and neonatal applications.

Note: Please contact our Biosensors Sales Representative for custom kits to meet your special requirements.

## Reusable ACCUTRANS Accessories

Product Code	Description
HM650-150	Vertical Mounting Clamp for IV Poles up to 4cm diameter.
HM-650-150-H	Horizontal Mounting Clamp for IV Poles up to 4cm diameter.
HM-650-150-R	Rotatable Mounting Clamp for IV Poles up to 4cm diameter in both vertical and horizontal application.
PMA-1	Transducer Holder that holds 1 transducer at one time.
3-in-1 Backplate	Transducer Holder that holds up to 3 transducers at one time.
MAC-XX**	3.05m Monitor Adapter Interface Cables for specific brands of monitors.

\*\*\* Please contact your Biosensors representative for assistance.

CE0044

Singapore:  
**Biosensors International Pte Ltd**  
 21 Kallang Avenue, #07-165/171,  
 Singapore 339412  
 Tel: +65 6411 0500  
 Fax: +65 6298 6242  
 Email: sales@biosensors.com.sg



[www.biosensors.com](http://www.biosensors.com)

United States of America:  
**Biosensors International USA**  
 20250 Acacia Street,  
 Suite 200, Newport Beach,  
 CA 92660, USA  
 Tel: +1 (949) 553 8300  
 Fax: +1 (949) 553 9129  
 Email: sales@biosensors-usa.com

China:  
**Biosensors International China Sales Office**  
 Room 408, Guobin Building,  
 No. 11, Fuchengmenwai Street, Xicheng District,  
 Beijing 100037, China  
 Tel: +86 (10) 6800 3481  
 Fax: +86 (10) 6800 4202  
 Email: sales.icu@jwmsgroup.com

Japan:  
**Biosensors Japan Co., Ltd.**  
 Bellebs Nagayama 501,  
 1-5 Nagayama, Tama-Shi,  
 Tokyo 206 0025, Japan  
 Tel: +81 (42) 355 3311  
 Fax: +81 (42) 355 3312  
 Email: cs@sj.co.jp

Netherlands:  
**Biosensors BV**  
 Weeresteinstraat 147,  
 2182 GV, Hillegom, The Netherlands  
 Tel: +31 (25) 251 7676  
 Fax: +31 (25) 252 6782  
 Email: sales-ccp-bv@biosensors.com

# ACCUTRANS

## Disposable Blood Pressure Transducer



**BIOSENSORS  
INTERNATIONAL**

Improving Lives Through Medical Innovation

# ACCUTRANS

Since 1990, Biosensors International has been a leader in the design, research, development and distribution of innovative medical devices including blood pressure monitoring system and therapeutic cardiovascular catheters.


The launch of ACCUTRANS reassures our customers that we are still anticipating to your increasing needs for innovative and ease-of-use Disposable Pressure Transducer.

By introducing ACCUTRANS to our existing products, we are offering one of the most comprehensive product ranges in the critical care arena.



## Features and Benefits of ACCUTRANS

- Completely compatible with current Biotrans II accessories.
- Small and lightweight. Ideal for both pole mount and patient mount applications.
- Convenient and easy to set-up and use.
- Least possibility of zero drift.
- Transparent body – clear fluid path visibility for debubbling.
- Two types of flush – controlled squeeze or pull-tab snap (dynamic waveform test).
- Available in standard or custom kit configurations.
- Optional color-coded tubings and lines.
- Infant & Neonatal customized kits configurations are available.

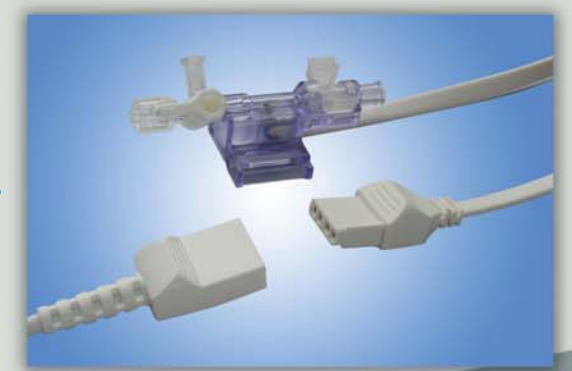

### ACCUTRANS Accessories

Fully compatible with accessories from the existing Biotrans II Transducer System.

### ACCUTRANS Transducer Interface Cable

Biosensors has the full range of transducer interface cables that is compatible to all commonly-used patient monitors in the market.

Biosensors makes ordering and stocking your monitoring components easy. Whether you require a standard kit, or prefer a customized version, we are prepared to respond to your critical care monitoring needs.

